

## Lexan\* Resin 144R

Americas: COMMERCIAL

UL rated HB. 200 series recommended when V-2 rating required. MFR 10.5. Internal mold release. FDA food contact compliant in limited colors. Effective January 15th, 2007 this grade will no longer be supported with biocompatibility information and should not be used for medical applications which require biocompatibility. Alternative grade HP4.

### Property

TYPICAL PROPERTIES <sup>(1)</sup>			
MECHANICAL	Value	Unit	Standard
Tensile Stress, yld, Type I, 50 mm/min	62	MPa	ASTM D 638
Tensile Stress, brk, Type I, 50 mm/min	68	MPa	ASTM D 638
Tensile Strain, yld, Type I, 50 mm/min	7	%	ASTM D 638
Tensile Strain, brk, Type I, 50 mm/min	130	%	ASTM D 638
Tensile Modulus, 50 mm/min	2370	MPa	ASTM D 638
Flexural Stress, yld, 1.3 mm/min, 50 mm span	97	MPa	ASTM D 790
Flexural Modulus, 1.3 mm/min, 50 mm span	2340	MPa	ASTM D 790
Hardness, Rockwell M	70	-	ASTM D 785
Hardness, Rockwell R	118	-	ASTM D 785
Taber Abrasion, CS-17, 1 kg	10	mg/1000cy	ASTM D 1044
Tensile Stress, yield, 50 mm/min	63	MPa	ISO 527
Tensile Stress, break, 50 mm/min	70	MPa	ISO 527
Tensile Strain, yield, 50 mm/min	6	%	ISO 527
Tensile Strain, break, 50 mm/min	110	%	ISO 527
Tensile Modulus, 1 mm/min	2350	MPa	ISO 527
Flexural Stress, yield, 2 mm/min	90	MPa	ISO 178
Flexural Modulus, 2 mm/min	2300	MPa	ISO 178
IMPACT	Value	Unit	Standard
Izod Impact, unnotched, 23°C	3204	J/m	ASTM D 4812
Izod Impact, notched, 23°C	801	J/m	ASTM D 256
Izod Impact, notched (natural, tints)	801	J/m	ASTM D 256
Izod Impact, notched (colors)	801	J/m	ASTM D 256
Tensile Impact, Type "S"	577	kJ/m <sup>2</sup>	ASTM D 1822
Falling Dart Impact (D 3029), 23°C	169	J	ASTM D 3029
Instrumented Impact Energy @ peak, 23°C	63	J	ASTM D 3763
Izod Impact, unnotched 80*10*4 +23°C	NA	kJ/m <sup>2</sup>	ISO 180/1U
Izod Impact, unnotched 80*10*4 -30°C	NA	kJ/m <sup>2</sup>	ISO 180/1U
Izod Impact, notched 80*10*4 +23°C	12	kJ/m <sup>2</sup>	ISO 180/1A
Izod Impact, notched 80*10*4 -30°C	10	kJ/m <sup>2</sup>	ISO 180/1A
Charpy Impact, notched, 23°C	35	kJ/m <sup>2</sup>	ISO 179/2C
Charpy 23°C, Unnotch Edgew 80*10*4 sp=62mm	NA	kJ/m <sup>2</sup>	ISO 179/1eU
Charpy -30°C, Unnotch Edgew 80*10*4 sp=62mm	NA	kJ/m <sup>2</sup>	ISO 179/1eU
THERMAL	Value	Unit	Standard
Vicat Softening Temp, Rate B/50	154	°C	ASTM D 1525
HDT, 0.45 MPa, 6.4 mm, unannealed	137	°C	ASTM D 648
HDT, 1.82 MPa, 6.4 mm, unannealed	132	°C	ASTM D 648
CTE, -40°C to 95°C, flow	6.84E-05	1/°C	ASTM E 831

**广州华秀塑胶有限公司**  
 (Sabic沙伯基础创新塑料一级经销商)  
 www.va-so.com 联系电话: 020-82582555

Specific Heat	1.25	J/g-°C	ASTM C 351
Thermal Conductivity	0.19	W/m-°C	ASTM C 177
Thermal Conductivity	0.2	W/m-°C	ISO 8302
CTE, 23°C to 80°C, flow	7.E-05	1/°C	ISO 11359-2
Ball Pressure Test, 125°C +/- 2°C	PASSES	-	IEC 60695-10-2
Vicat Softening Temp, Rate A/50	153	°C	ISO 306
Vicat Softening Temp, Rate B/50	141	°C	ISO 306
Vicat Softening Temp, Rate B/120	142	°C	ISO 306
HDT/Be, 0.45MPa Edgew 120*10*4 sp=100mm	136	°C	ISO 75/Be
HDT/Ae, 1.8 MPa Edgew 120*10*4 sp=100mm	125	°C	ISO 75/Ae
Relative Temp Index, Elec	130	°C	UL 746B
Relative Temp Index, Mech w/impact	130	°C	UL 746B
Relative Temp Index, Mech w/o impact	130	°C	UL 746B
<b>PHYSICAL</b>	<b>Value</b>	<b>Unit</b>	<b>Standard</b>
Specific Gravity	1.2	-	ASTM D 792
Specific Volume	0.83	cm³/g	ASTM D 792
Density	1.19	g/cm³	ASTM D 792
Water Absorption, 24 hours	0.15	%	ASTM D 570
Water Absorption, equilibrium, 23C	0.35	%	ASTM D 570
Water Absorption, equilibrium, 100°C	0.58	%	ASTM D 570
Mold Shrinkage, flow, 3.2 mm	0.5 - 0.7	%	SABIC Method
Melt Flow Rate, 300°C/1.2 kgf	10.5	g/10 min	ASTM D 1238
Melt Volume Rate, MVR at 300°C/1.2 kg	10	cm³/10 min	ISO 1133
<b>OPTICAL</b>	<b>Value</b>	<b>Unit</b>	<b>Standard</b>
Light Transmission	88	%	ASTM D 1003
Haze	1	%	ASTM D 1003
Refractive Index	1.586	-	ASTM D 542
<b>ELECTRICAL</b>	<b>Value</b>	<b>Unit</b>	<b>Standard</b>
Volume Resistivity	>1.E+17	Ohm-cm	ASTM D 257
Dielectric Strength, in air, 3.2 mm	14.9	kV/mm	ASTM D 149
Relative Permittivity, 50/60 Hz	3.17	-	ASTM D 150
Relative Permittivity, 1 MHz	2.96	-	ASTM D 150
Dissipation Factor, 50/60 Hz	0.0009	-	ASTM D 150
Dissipation Factor, 1 MHz	0.01	-	ASTM D 150
Hot Wire Ignition {PLC}	2	PLC Code	UL 746A
High Voltage Arc Track Rate {PLC}	2	PLC Code	UL 746A
High Ampere Arc Ign, surface {PLC}	1	PLC Code	UL 746A
Comparative Tracking Index (UL) {PLC}	2	PLC Code	UL 746A
Volume Resistivity	>1.E+15	Ohm-cm	IEC 60093
Surface Resistivity, ROA	>1.E+15	Ohm	IEC 60093
Dielectric Strength, in oil, 3.2 mm	17	kV/mm	IEC 60243-1
Relative Permittivity, 50/60 Hz	2.7	-	IEC 60250
Relative Permittivity, 1 MHz	2.7	-	IEC 60250
Dissipation Factor, 50/60 Hz	0.001	-	IEC 60250
Dissipation Factor, 1 MHz	0.01	-	IEC 60250
<b>FLAME CHARACTERISTICS</b>	<b>Value</b>	<b>Unit</b>	<b>Standard</b>
UL Recognized, 94HB Flame Class Rating (3)	147	mm	UL 94
Oxygen Index (LOI)	25	%	ASTM D 2863
Oxygen Index (LOI)	25	%	ISO 4589


Processing

Parameter

Injection Molding

Value

Unit

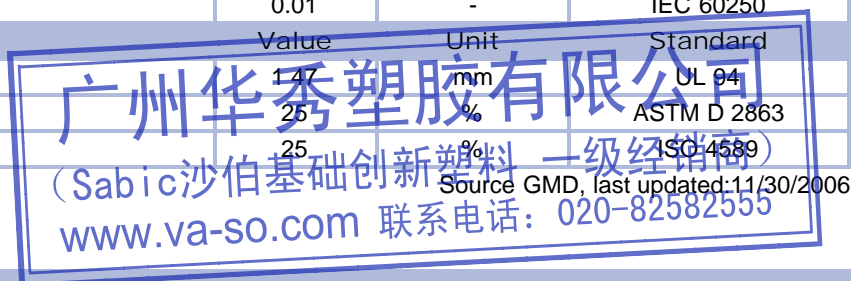

Drying Temperature	120	°C
Drying Time	3 - 4	hrs
Drying Time (Cumulative)	48	hrs
Maximum Moisture Content	0.02	%
Melt Temperature	295 - 315	°C
Nozzle Temperature	290 - 310	°C
Front - Zone 3 Temperature	295 - 315	°C
Middle - Zone 2 Temperature	280 - 305	°C
Rear - Zone 1 Temperature	270 - 295	°C
Mold Temperature	70 - 95	°C
Back Pressure	0.3 - 0.7	MPa
Screw Speed	40 - 70	rpm
Shot to Cylinder Size	40 - 60	%
Vent Depth	0.025 - 0.076	mm

Source GMD, last updated:11/30/2006

THESE PROPERTY VALUES ARE NOT INTENDED FOR SPECIFICATION PURPOSES.

PLEASE CHECK WITH YOUR [\(LOCAL SALES OFFICE\)](#) FOR AVAILABILITY IN YOUR REGION

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

**Disclaimer :** THE MATERIALS AND PRODUCTS OF THE BUSINESSES MAKING UP THE SABIC INNOVATIVE PLASTICS COMPANY, ITS SUBSIDIARIES AND AFFILIATES ("SABIC IP"), ARE SOLD SUBJECT TO SABIC IP' S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SABIC IP MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (I) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (II) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SABIC IP MATERIALS, PRODUCTS, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN SABIC IP' S STANDARD CONDITIONS OF SALE, SABIC IP AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS OR PRODUCTS DESCRIBED HEREIN. Each user bears full responsibility for making its own determination as to the suitability of SABIC IP' s materials, products, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating SABIC IP materials or products will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of SABIC IP' s Standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by SABIC IP. No statement contained herein concerning a possible or suggested use of any material, product or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of SABIC Innovative Plastics Company or any of its subsidiaries or affiliates covering such use or design, or as a recommendation for the use of such material, product or design in the infringement of any patent or other intellectual property right

\* Lexan is a trademark of the SABIC Innovative Plastics Company

© 1997-2008 SABIC Innovative Plastics Company.All rights reserved

